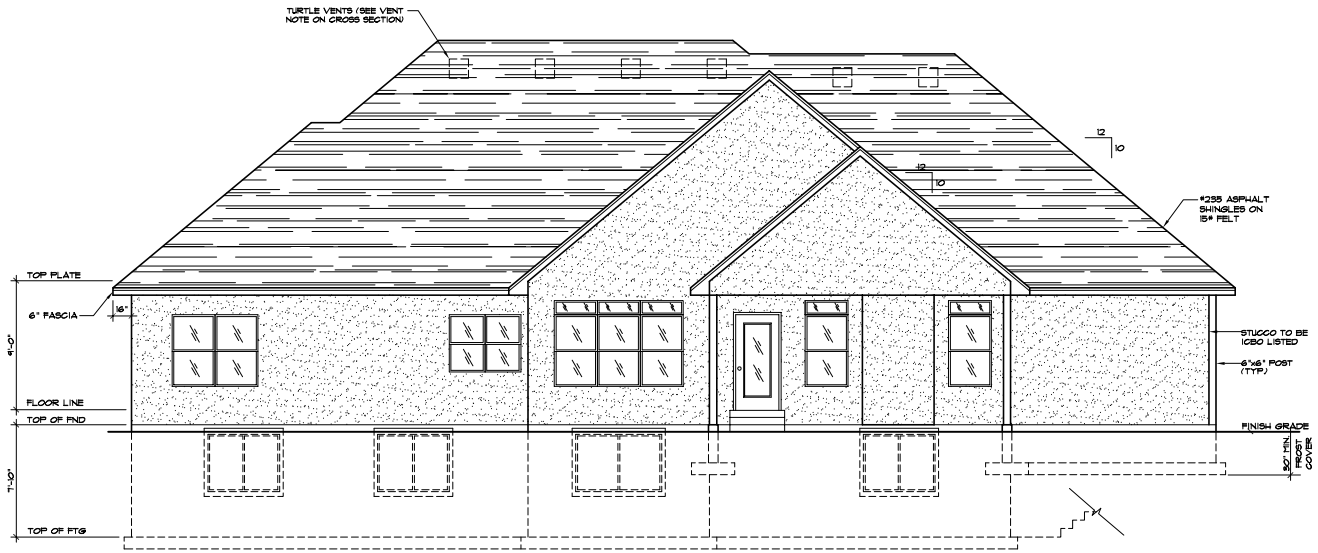

REAR ELEVATION

SCALE: 1/4" = 1'-0"

MASONRY VENEER SHALL HAVE CORROSION RESISTANT ANCHOR TIES OF NOT LESS THAN 22 GA. x 7/8" OR NO. 9 GA. WIRE. SPACED NOT MORE THAN 24"o.c. HORIZONTAL AND SUPPORT A MAXIMUM OF 2 SQUARE FEET OF WALL AREA. AROUND WALL OPENINGS GREATER THAN 16", ADDITIONAL TIES ARE REQUIRED TO BE SPACED A MAXIMUM OF 36"o.c. AND BE WITHIN 12" OF THE OPENING. PROVIDE 26 GAUGE FLASHING FROM FOUNDATION UP FIRST 3 COURSES.

PROVIDE COUNTERFLASHING AND CAULKING AT ALL EXTERIOR DOORS AND WINDOWS

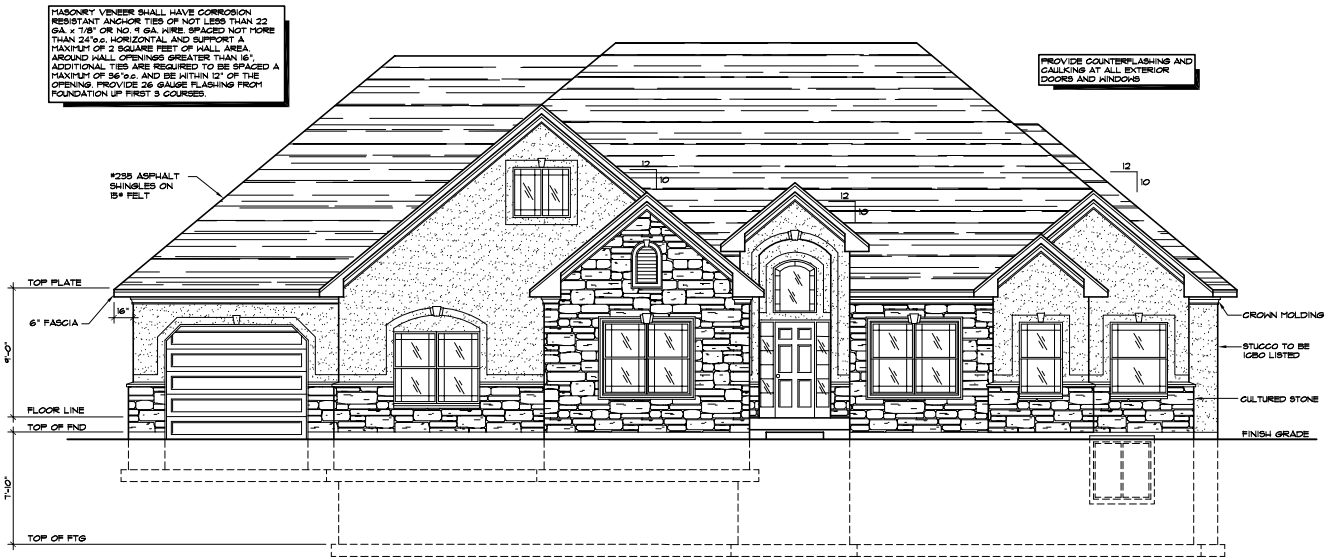

FRONT ELEVATION

SCALE: 1/4" = 1'-0"

Hearthstone Design
Specializing in Home Design and Planning
© Copyright 2004 Hearthstone Design, Inc. All Rights Reserved
Toll Free 1-866-298-2505 www.hearthstonedesign.net

GALLANT HOMES
JONES FARM 2 SUBDIVISION
LOT # 220 - SOUTH JORDAN
DATE: 7 JUNE 2005

PLAN R-2272a-003

SHEET
3